

# KALDEWEI



# FLOW

Exclusive designer shower profiles and point wastes as eye-catchers in the bathroom. Design Studio Aisslinger



FLOWLINE ZERO · CHAMPAGNE BRUSHED

## KALDEWEI FLOW – MODERN PREMIUM SHOWER WASTES

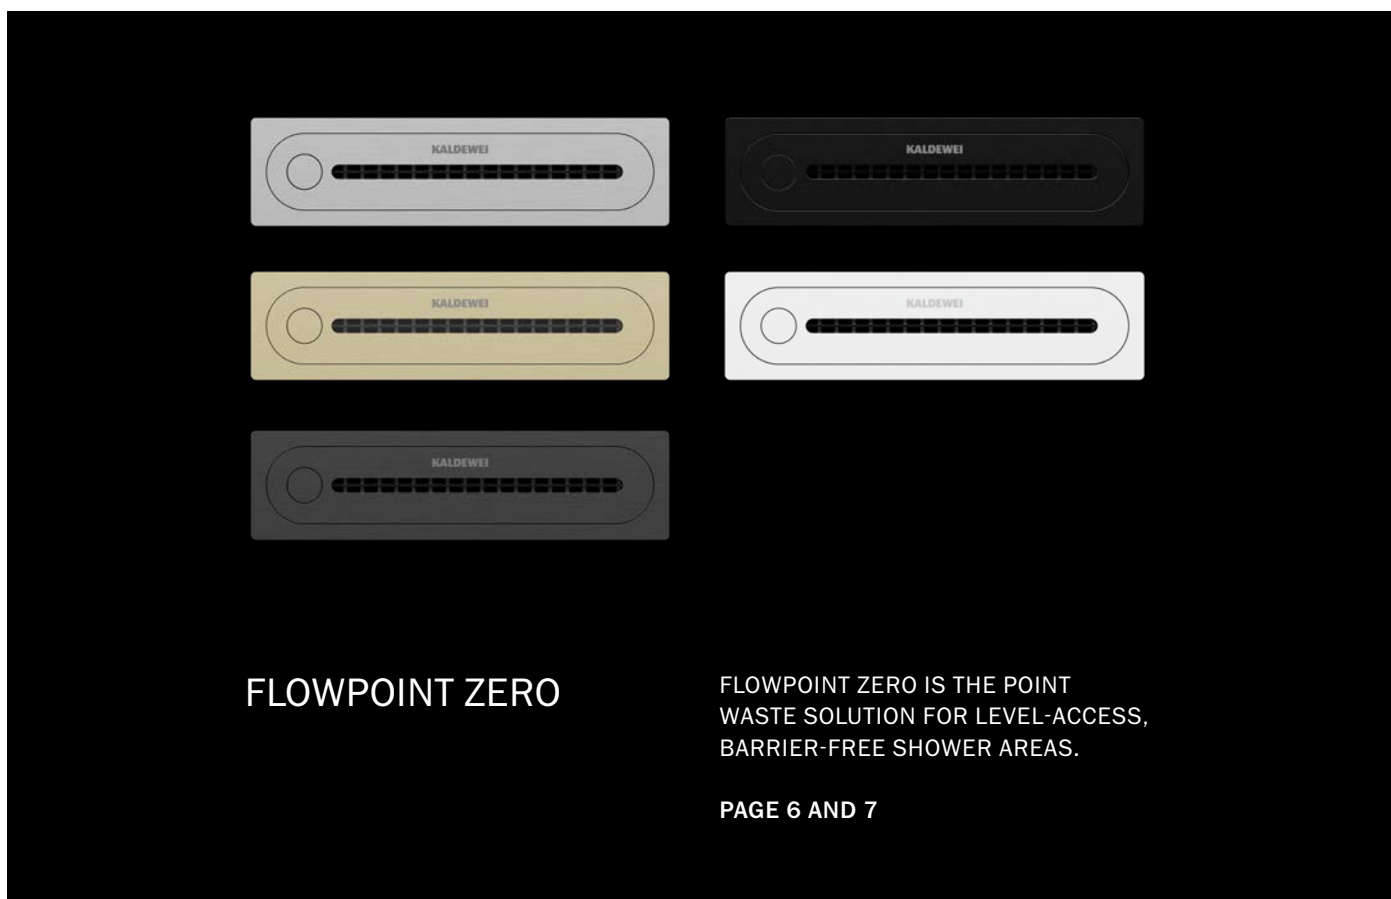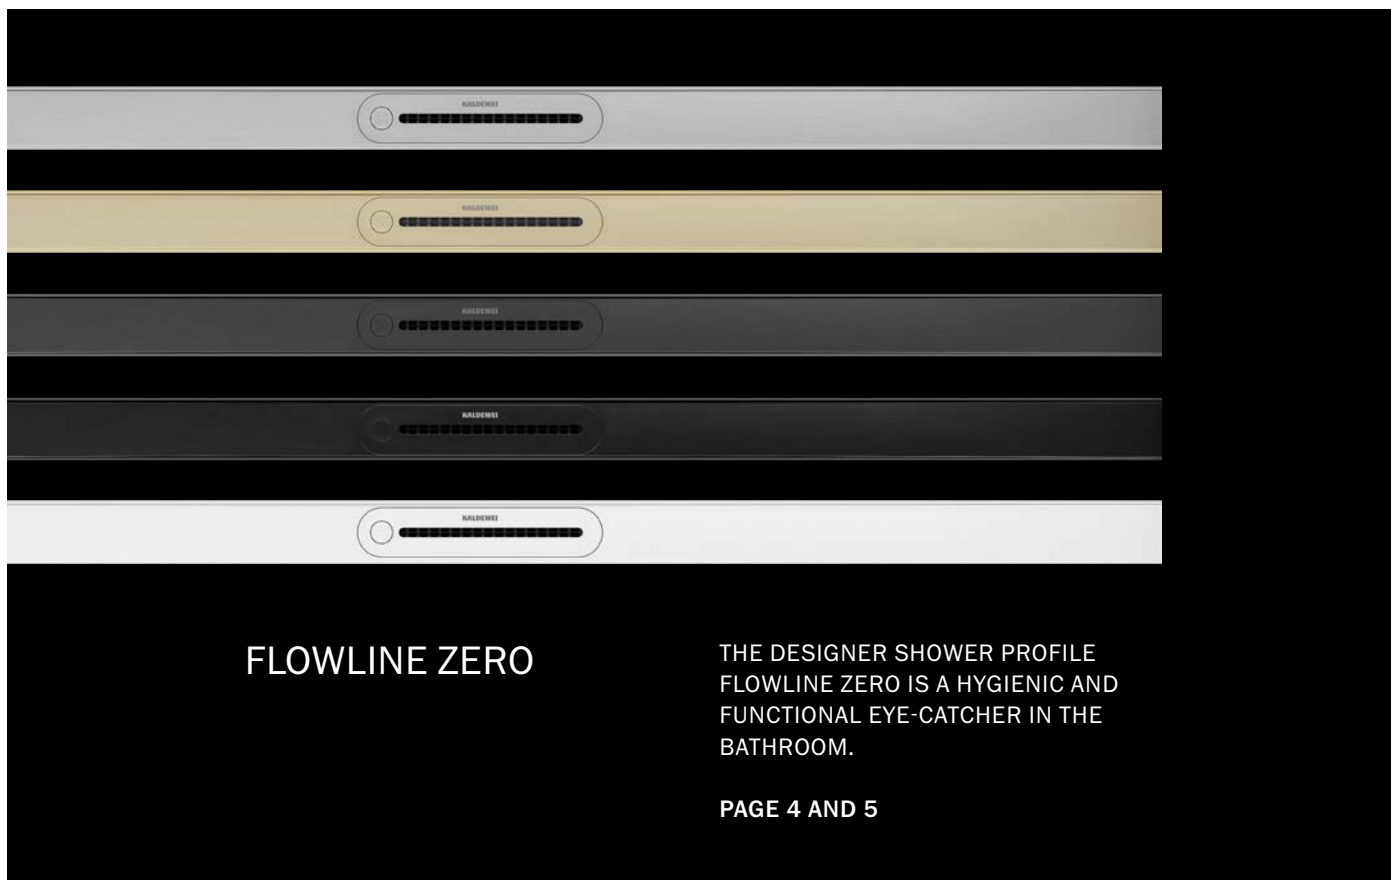

## KALDEWEI CLICK'N CLEAN® – INNOVATION FOR CLEANLINESS IN THE BATHROOM

With CLICK'n CLEAN®, the designers at KALDEWEI have developed a ground-breaking opening mechanism. It can be operated with just one hand without any additional aids. This makes cleaning easier, quicker and more user-friendly than with any other shower channel before.




The revolutionary shower concept for FLOWLINE ZERO and FLOWPOINT ZERO was developed to meet the highest demands. KALDEWEI FLOW gives all shower bases a special exclusivity.

With the patent-pending KALDEWEI CLICK'n CLEAN® mechanism, the cover can be opened easily with one hand and cleaning is child's play. KALDEWEI CLICK'n CLEAN®. It can be that simple.



SO EASY TO OPEN ...  
<https://qrco.de/bdkXly>

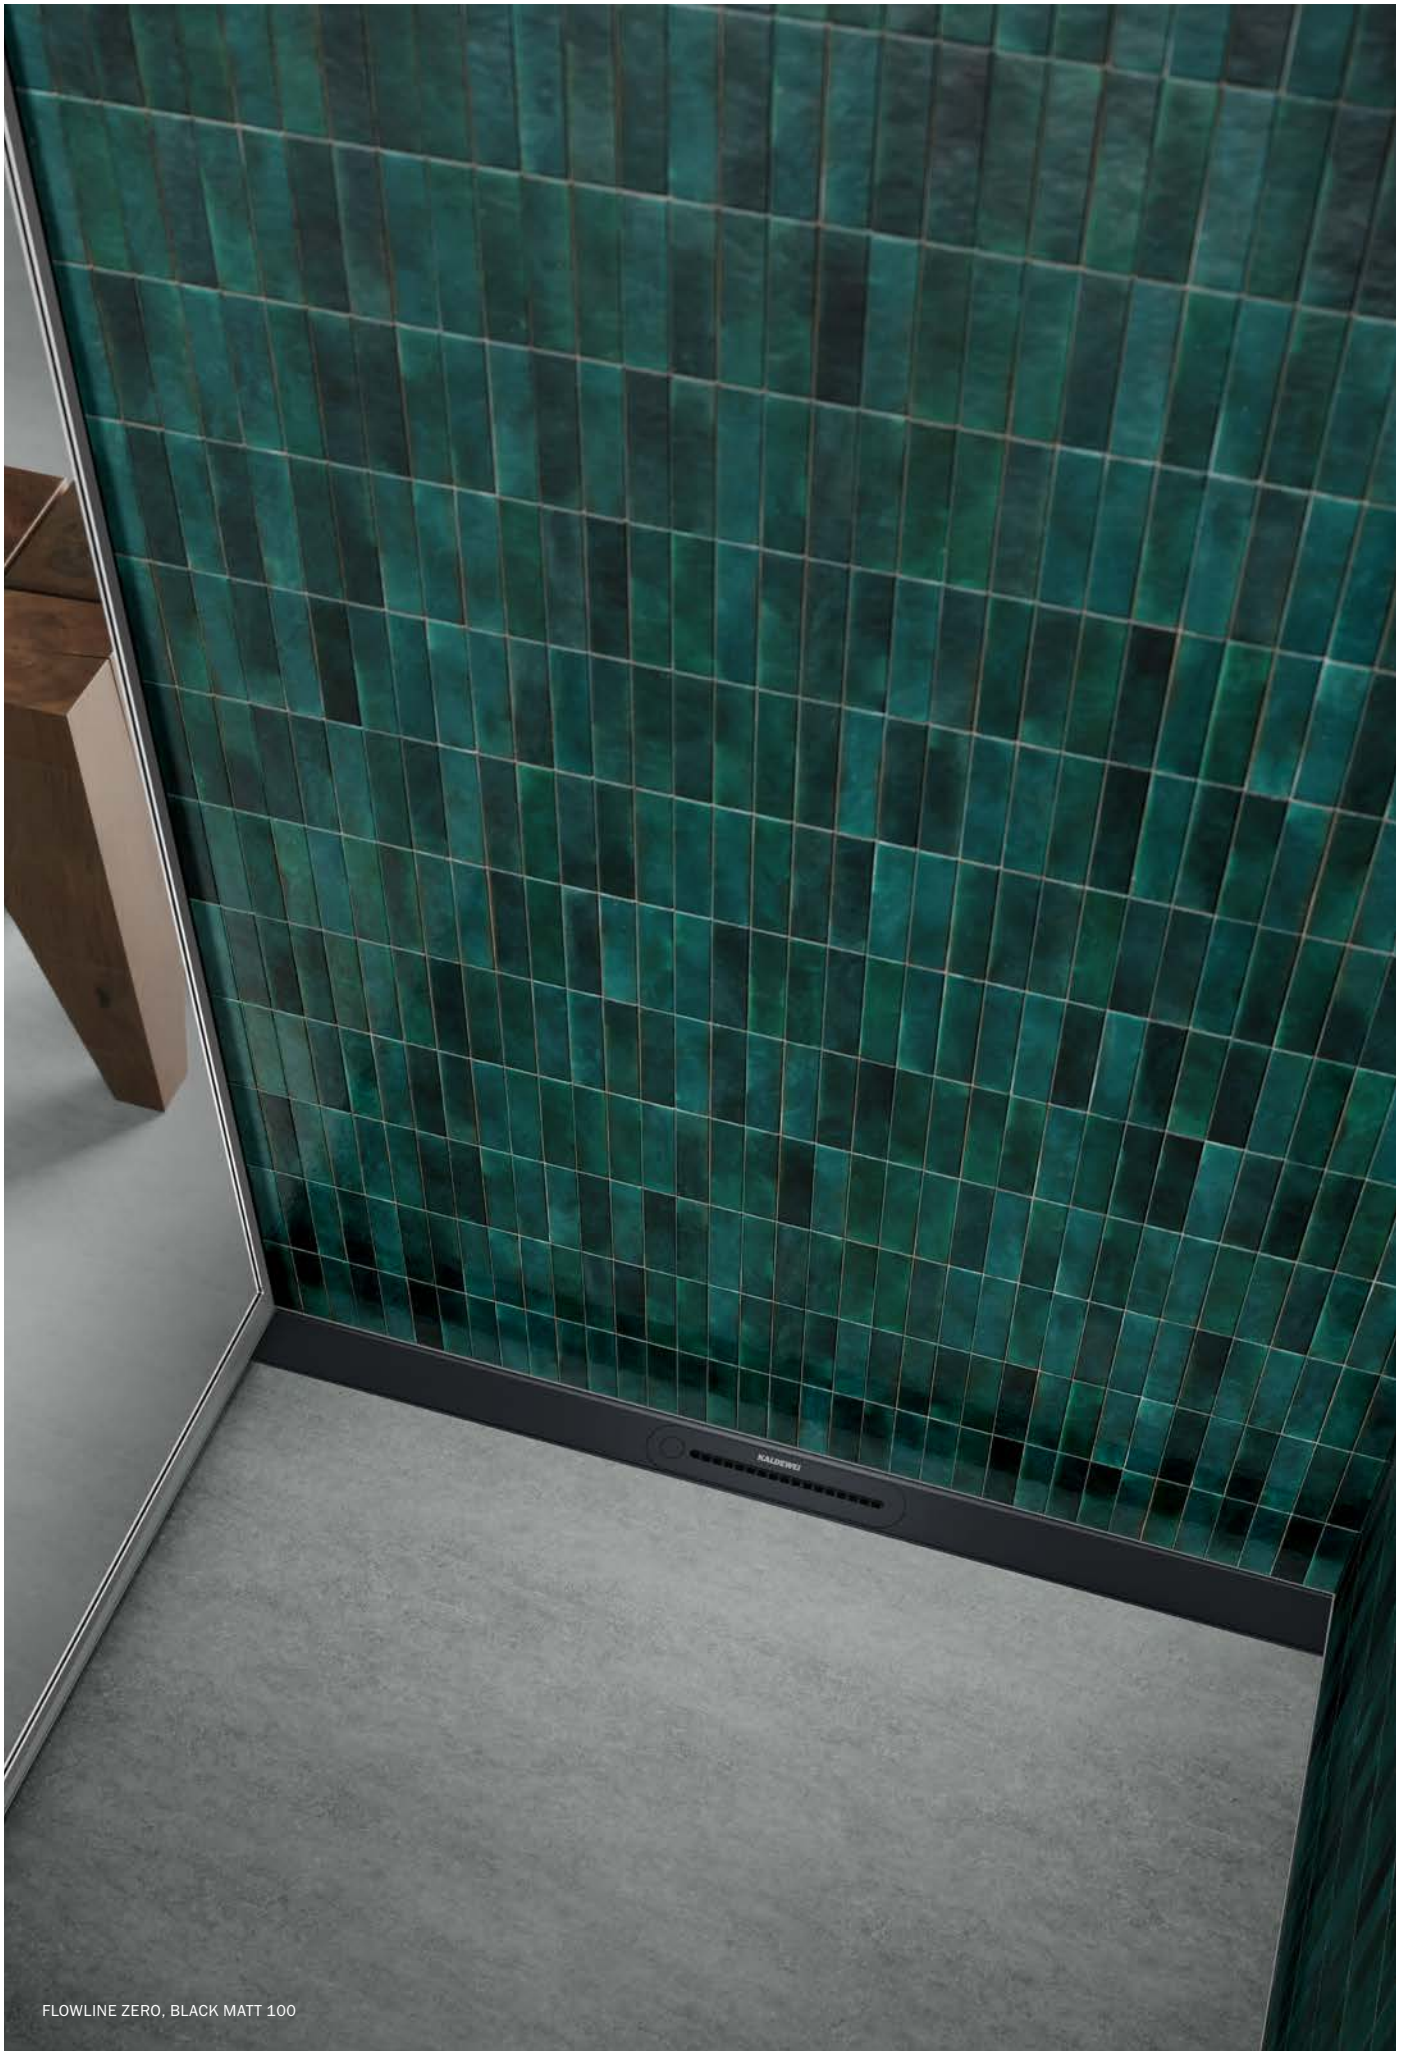

FLOWLINE ZERO, BLACK MATT 100

# FLOWLINE ZERO

Timeless elegance

- Designer shower profile made of high-quality stainless steel
- Quick and easy cleaning with the KALDEWEI CLICK'n CLEAN® opening mechanism
- Customised installation thanks to infinite adjustment of the standard lengths 900 mm, 1,200 mm and 1,500 mm
- Total floor structure (tile, tile adhesive, waterproofing) from 11 mm to 28 mm
- Positioning in front of the wall as well as directly by the wall possible with wall-side overall structure (silicone, tile, tile adhesive, sealant) from 14 mm to 20 mm
- Incl. shortenable height levelling pieces for flexible adjustment of the overall floor-side structure
- Perfectly matched to all FLOWDRAIN HORIZONTAL waste fittings complete sets



BRUSHED STAINLESS STEEL



CHAMPAGNE BRUSHED



GRAPHITE BRUSHED



BLACK MATT 100



ALPINE WHITE MATT

| DIMENSIONS (MM) | MODEL NO. | ARTICLE NO.* |
|-----------------|-----------|--------------|
| L 900           | 2400      | 940000010XXX |
| L 1200          | 2401      | 940100010XXX |
| L 1500          | 2402      | 940200010XXX |

\* The last three digits of the article no. result from the colour selection



# FLOWPOINT ZERO

To the point

- Timeless design made from high-quality stainless steel
- Quick and easy cleaning with the KALDEWEI CLICK'n CLEAN® opening mechanism
- Can be flexibly positioned directly in front of the wall or by the centre of the shower area
- Wall-side build-up of  $\geq 14.5\text{ mm} \pm 3\text{ mm}$ . Floor-side structure from 11 mm to 28 mm
- Perfectly matched to the required FLOWDRAIN HORIZONTAL waste fittings
- Design STUDIO AISSLINGER



BRUSHED STAINLESS STEEL



CHAMPAGNE BRUSHED



GRAPHITE BRUSHED



BLACK MATT 100



ALPINE WHITE MATT

| DIMENSIONS (MM)     | MODEL NO. | ARTICLE NO.*  |
|---------------------|-----------|---------------|
| L 233 X W 60 X H 11 | 2410      | 9410000100XXX |

\* The last three digits of the article no. result from the colour selection



FLOWPOINT ZERO BRUSHED STAINLESS STEEL  
POSITIONED IN THE CENTRE OF THE SHOWER AREA



POSITIONING DIRECTLY BY THE WALL



POSITIONING IN FRONT OF THE WALL

# FLOWDRAIN



FLOWDRAIN HORIZONTAL REGULAR



FLOWDRAIN HORIZONTAL FLAT

## FLOWDRAIN HORIZONTAL REGULAR

- Quick and easy installation, sealing and sound insulation thanks to the all-in-one set
- Easy-to-remove siphon for easy cleaning
- Low installation height: DN 50 with installation heights from 78 mm to 179 mm
- Positioning in front of the wall as well as directly by the wall possible with wall-side overall structure (silicone, tile, tile adhesive, sealant) from 14 mm to 20 mm
- Standardised drainage capacity in accordance with DIN EN 1253 0.8 l/s with a required accumulation height of 20 mm (sealing water height 50 mm)
- Perfectly matched to all FLOWLINE ZERO shower profiles and FLOWPOINT ZERO point wastes
- Independent expert tests\* confirm the safety of the waste fitting with a point screed cover of 15 mm
- Maximum stability and load-bearing capacity up to 300 kg (50 mm × 50 mm)
- High-quality screed systems such as Sopro Rapidur® increase stability and safety

## FLOWDRAIN HORIZONTAL FLAT

- Quick and easy installation, sealing and sound insulation thanks to the all-in-one set
- Easy-to-remove siphon for easy cleaning
- Low installation height: DN 40 with installation heights from 58 mm to 78 mm
- Positioning in front of the wall as well as directly by the wall possible with wall-side overall structure (silicone, tile, tile adhesive, sealant) from 14 mm to 20 mm
- Drainage rate 0.63 l/s with a required accumulation height of 20 mm (sealing water height 30 mm)
- Perfectly matched to all FLOWLINE ZERO shower profiles and FLOWPOINT ZERO point wastes
- Independent expert tests\* confirm the safety of the waste fitting with a point screed cover of 15 mm
- Maximum stability and load-bearing capacity up to 300 kg (50 mm × 50 mm)
- High-quality screed systems such as Sopro Rapidur® increase stability and safety

\*Source: Institute for Building Technology and Floor Construction GASSER

| DRAIN TECHNOLOGY             | MODEL NO. | ARTICLE NO.  |
|------------------------------|-----------|--------------|
| FLOWDRAIN HORIZONTAL REGULAR | 4203      | 687744800000 |
| FLOWDRAIN HORIZONTAL FLAT    | 4204      | 687744810000 |