


CENTRO DUO OVAL

- pure simplicity and unpretentious elegance distinguish these baths
- enamelled waste cover and overflow knob integrated in the bath design
- bathing with a friend: two identical back rests and centrally positioned waste
- made of KALDEWEI steel enamel




Similar illustration



Kaldewei Bathtubs succeed the following standards:
IAPMO, ASME A112.19.1, CSA B45.2, UPC, NPC, IPC

Notes:
Kaldewei bathtubs will comply with the Americans with Disabilities Act when installed per the requirements of the Accessibility Guidelines, Section 607 bathtubs, of the Act.

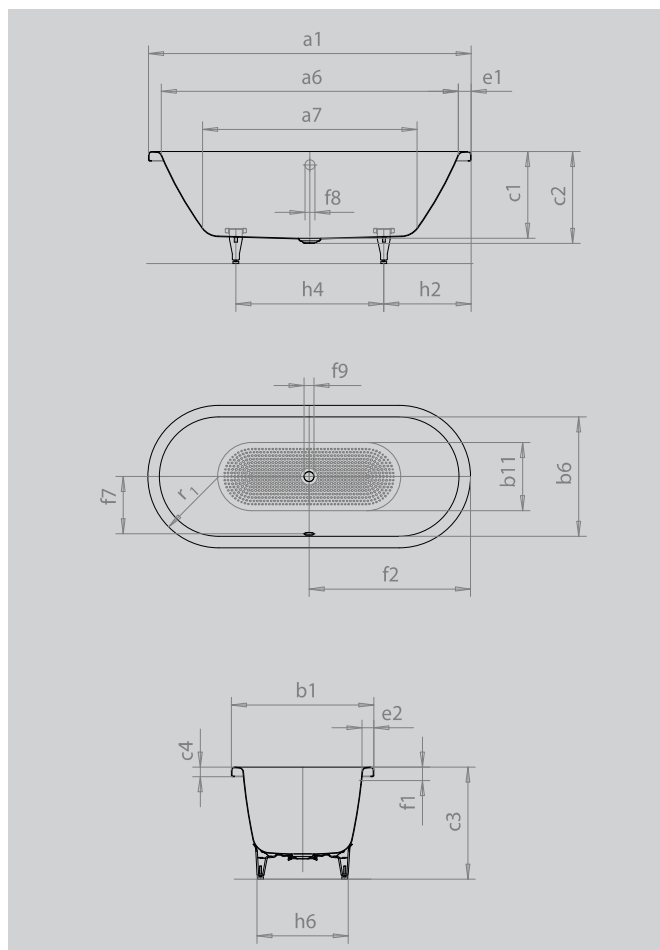

Model		127	128
External length	a_1	66.93	70.87
Internal length (top)	a_6	62.2	66.14
Internal length (bottom)	a_7	44.49	48.43
External width	b_1	29.53	31.5
Internal width (top)	b_6	24.8	26.77
Internal width (bottom)	b_{11}	20.08	22.05
Depth inside	c_1	18.11	18.11
Depth incl. waste hole	c_2	19.09	19.09
Height of rim	c_4	1.97	1.97
Width of rim (foot end; long side)	e_1, e_2	2.36; 2.36	2.36; 2.36
Distance top edge to centre of overflow hole	f_1	2.76	2.76
Distance bath edge to centre of waste hole	f_2	33.46	35.43
Distance centre of waste hole to centre of overflow hole	f_7	12.09	13.07
Diameter of overflow hole	f_8	Ø 2.05	Ø 2.05
Diameter of waste hole	f_9	Ø 2.05	Ø 2.05
Distance foot end of bath edge to centre of foot	h_2	22.05	23.62
Distance between the feet	h_4	22.83	23.62
Width of feet max.	h_6	18.31	21.26
External radius	r_1	14.76	15.75
Water volume		41.21	51.51 gal
Net weight		105.82	116.85 lbs
Feet Kit		5030	5032
Full anti-slip		35.43 x 11.81	35.43 x 11.81

Subject to technical alterations, tolerances and errors. Similar illustration.
18.49 gallons displacement on average.

KALDEWEI