
CENTRO DUO OVAL

- pure simplicity and unpretentious elegance distinguish these baths
- enamelled waste cover and overflow knob integrated in the bath design (also available with filling function)
- bathing with a friend: two identical back rests and centrally positioned waste
- made of KALDEWEI steel enamel



Similar illustration



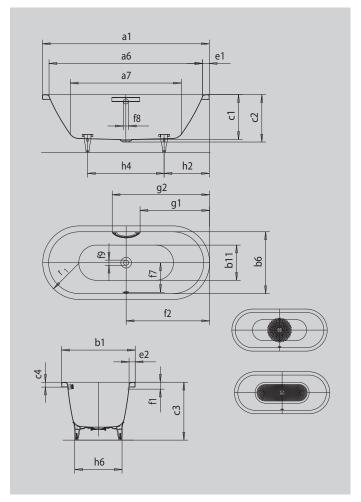









External length a ₁ 1800 mm Internal length (top) a ₆ 1680 mm Internal length (bottom) b ₇ 1820 mm External width (tottom) b ₈ 680 mm Internal width (bottom) b ₆ 680 mm Depth incid. c ₇ 460 mm Depth incid. c ₇ 485 mm Depth incid. c ₈ 595 - 630 mm Depth incid. c ₈ 595 - 630 mm Distance bath edge to centre of overflow hole c ₁ 500 mm Distance bath edge to centre of overflow hole c ₁ 900 mm Distance bath edge to centre of overflow hole c ₁ 900 mm Distance bath edge (foot end) to start of grip c ₈ 92 mm Distance bath edge (foot end) to start of grip c ₈ 92 mm Distance bath edge (foot end) to end of grip c ₈ 92 mm Distance bath edge (foot end) to end of grip c ₈ 92 mm Distance bath edge (foot end) to end of grip c ₉ 94 mm Distance bath edge (foot end) to end of grip c ₉ 94 mm			
internal length (top) 0 e 1680 mm internal length (bottom) a, 1230 mm internal width (top) b, 6680 mm internal width (bottom) b, 560 mm bepth incli waste hole c, 460 mm belgith with feet c, 595 - 630 mm belgith frim (foot end; long side) e, 50 mm bickance bath edge to centre of overflow hole f, 70 mm Distance bath edge to centre of waste hole f, 332 mm Distance bath edge to centre of vaste hole f, 95 mm Distance bath edge (foot end) to start of grip g, 95 mm Distance bath edge (foot end) to start of grip g, 95 mm Distance bath edge (foot end) to start of grip g, 95 mm Distance bath edge (foot end) to start of grip g, 95 mm Distance bath edge (foot end) to start of grip g, 96 mm Distance bath edge (foot end) to end of grip g, 90 mm Distance bath edge (foot end) to end of grip g, 90 mm External radius r, </th <th>Model</th> <th></th> <th>128</th>	Model		128
Internal length (bottom) a ₁ 1230 mm External width b ₁ 800 mm Internal width (top) b ₂ 6800 mm Internal width (bottom) b ₁ 560 mm Depth inside c ₂ 460 mm Depth inside c ₂ 455 mm Height with feet c ₃ 595 -630 mm Height of rim c ₄ 50 mm Nidth of rim (foot end; long side) e ₁ e ₂ 60; 60 mm Distance both edge to centre of overflow hole f ₂ 60; 60 mm Distance both edge to centre of waste hole f ₂ 900 mm Distance both edge to centre of waste hole f ₂ 332 mm Distance both edge (foot end) to start of gip g ₁ 95 5mm Distance both edge (foot end) to start of gip g ₂ 104 2mm Distance both edge (foot end) to start of gip g ₂ 104 2mm Distance both edge (foot end) to end of gip g ₂ 104 2mm Distance both edge (foot end) to end of gip g ₂ 600 mm Distance both edge (foot end) to end of gip g ₂	External length	a_1	1800 mm
External width (top) b ₁ 800 mm internal width (top) b ₆ 680 mm bepth inside c ₁ 460 mm bepth incl. waste hole c ₂ 485 mm beight with feet c ₃ 595 - 630 mm beight of rim c ₄ 50 mm width of rim (foot end; long side) e ₁ ; e ₂ 60; 60 mm bistance bath edge to centre of overflow hole f ₂ 900 mm Distance bath edge to centre of waste hole to get of waste hole to centre of overflow hole f ₃ 332 mm Distance bath edge (foot end) to start of grip g ₃ 952 mm Distance bath edge (foot end) to start of grip g ₃ 952 mm Distance bath edge (foot end) to end of grip g ₂ 900 mm Distance bath edge (foot end) to end of grip g ₂ 900 mm Distance bath edge (foot end) to end of grip g ₂ 900 mm Distance bath edge (foot end) to end of grip g ₂ 900 mm Distance bath edge (foot end) to end of grip g ₂ 900 mm Width of feet max.	Internal length (top)	a ₆	1680 mm
internal width (top) b ₁ 680 mm internal width (bottom) b ₁ 560 mm Depth incide c ₁ 460 mm Depth incid waste hole c ₂ 485 mm Depth incil waste hole c ₂ 595 - 630 mm Height with feet c ₃ 595 - 630 mm Height of rim c ₄ 50 mm Width of rim (foot end; long side) e ₁ , e ₂ 60; 60 mm Distance both edge to centre of overflow hole f ₂ 900 mm Distance both edge to centre of waste hole to entre of overflow hole f ₈ 90 52 mm Distance both edge (foot end) to start of ging g ₁ 95 52 mm Distance both edge (foot end) to start of ging g ₂ 95 52 mm Distance both edge (foot end) to start of ging g ₂ 1042 mm Distance both edge (foot end) to start of ging g ₂ 600 mm Distance both edge (foot end) to start of ging g ₂ 1042 mm Distance both edge (foot end) to entre of foot h ₂ 600 mm Distance both edge (foot end) to entre of foot h ₂ 600 mm	Internal length (bottom)	a ₇	1230 mm
Internal width (bottom) b ₁ 1 560 mm Depth inside c ₁ 460 mm Depth incl. waste hole c ₂ 485 mm Height with feet c ₃ 595-630 mm Height of rim c ₄ 50 mm Width of rim (foot end; long side) e ₁ ; e ₂ 60; 60 mm Distance both edge to centre of overflow hole f ₁ f ₂ 900 mm Distance both edge to centre of waste hole to centre of was	External width		800 mm
Internal width (bottom) b ₁ 1 560 mm Depth inside c ₁ 460 mm Depth incl. waste hole c ₂ 485 mm Height with feet c ₃ 595-630 mm Height of rim c ₄ 50 mm Width of rim (foot end; long side) e ₁ ; e ₂ 60; 60 mm Distance both edge to centre of overflow hole f ₁ f ₂ 900 mm Distance both edge to centre of waste hole to centre of was	Internal width (top)	b ₆	680 mm
Depth incl. waste hole c ₂ 485 mm Height with feet c ₃ 595 - 630 mm Height of irim c ₄ 50 mm Width of rim (foot end; long side) e ₁ ; e ₂ 60; 60 mm Distance top edge to centre of overflow hole f ₁ 70 mm Distance centre of waste hole to centre of overflow hole f ₂ 900 mm Distance centre of waste hole to centre of overflow hole f ₇ 332 mm Distance both edge (foot end) to start of grip g ₈ 0 52 mm Distance both edge (foot end) to start of grip g ₂ 1042 mm Distance both edge (foot end) to end of grip g ₂ 1042 mm Distance both edge to centre of foot h ₂ 600 mm Distance both edge to centre of foot h ₂ 600 mm Distance both edge to centre of foot h ₂ 600 mm Distance both edge to centre of foot h ₂ 600 mm Distance both edge to end of bath edge to centre of foot h ₂ 600 mm Distance both edge to end to end of grip g ₂ 600 mm Distance both edge to end to end of grip g ₂	Internal width (bottom)		560 mm
Height with feet c ₃ 595 - 630 mm Height of rim c ₄ 50 mm Width of rim (foot end; long side) e ₁ ; e ₂ 60; 60 mm Distance top edge to centre of overflow hole f ₂ 900 mm Distance bath edge to centre of waste hole to recentre of waste hole to centre of overflow hole f ₂ 900 mm Distance centre of waste hole to centre of overflow hole f ₈ 0 52 mm Distance to for waste hole to centre of overflow hole f ₉ 0 52 mm Distance bath edge (foot end) to start of grip g ₁ 758 mm Distance bath edge (foot end) to end of grip g ₂ 1042 mm Distance between the feet h ₂ 600 mm Width of feet max. h ₄ 600 mm Width of return and indius r ₁ 400 mm Water volume 1951 1951 Vet weight 53 kg 533 kg Pedestal 5032 5435 mm	Depth inside	$c_{_1}$	460 mm
Height of rim c4 50 mm Width of rim (foot end; long side) e1; e2 60; 60 mm Distance top edge to centre of overflow hole f1 70 mm Distance bath edge to centre of waste hole f2 900 mm Distance centre of waste hole to centre of overflow hole f7 332 mm Distance to will whole f8 0 52 mm Distance bath edge (foot end) to start of grip g1 758 mm Distance bath edge (foot end) to start of grip g2 102 mm Distance bath edge (foot end) to end of grip g2 102 mm Distance bath edge (foot end) to end of grip g2 600 mm Distance bath edge to centre of foot h2 600 mm Distance between the feet h4 600 mm Width of feet max. h6 540 mm External radius r1 400 mm Water volume 1951 Net weight 53 kg Pedestal 5032 Diameter of anti-slip 9 435 mm	Depth incl. waste hole	C_2	485 mm
Width of rim (foot end; long side) e, i e g 60; 60 mm Distance top edge to centre of overflow hole f g 70 mm Distance bath edge to centre of waste hole f g 332 mm Distance bath edge (foot end) to start of grip f g 0 52 mm Distance bath edge (foot end) to end of grip g g 758 mm Distance bath edge (foot end) to end of grip g g 1042 mm Distance both edge to centre of foot h g 600 mm Distance between the feet h g 600 mm Width of feet max. h g 600 mm External radius f g 400 mm Water volume 1951 1951 Net weight 53 kg 2962 Distance for of anti-slip 1951	Height with feet	C_3	595 - 630 mm
Stance top edge to centre of overflow hole f 900 mm Stance centre of waste hole f 900 mm Stance bath edge (foot end) to start of grip g 900 mm Stance bath edge (foot end) to start of grip g 900 mm Stance bath edge (foot end) to end of grip g 900 mm Stance bath edge (foot end) to end of grip g 900 mm Stance bath edge (foot end) to end of grip g 900 mm Stance between the feet f 900 mm Stance between the feet f 900 mm Stance between the feet f 900 mm Stance bath edge (foot end) to end of grip g 900 mm Stance between the feet f 900 mm	Height of rim	C_4	50 mm
Distance bath edge to centre of waste hole f ₂ 900 mm Distance centre of waste hole to centre of overflow hole f ₇ 332 mm Distance centre of waste hole to centre of overflow hole f ₈ Ø 52 mm Distance bath edge (foot end) to start of grip g ₁ Ø 52 mm Distance bath edge (foot end) to end of grip g ₂ 1042 mm Distance foot end of bath edge to centre of foot h ₂ 600 mm Distance between the feet h ₄ 600 mm Width of feet max. h ₆ 540 mm External radius r ₁ 400 mm Water volume 1951 Net weight 53 kg Pedestal 5032 Diameter of anti-slip Ø 435 mm	Width of rim (foot end; long side)	e ₁ ; e ₂	60; 60 mm
Distance centre of waste hole to centre of overflow hole or flaw	Distance top edge to centre of overflow hole	f_1	70 mm
Diameter of overflow hole fs Ø 52 mm Diameter of waste hole fs Ø 52 mm Distance bath edge (foot end) to start of grip gs 758 mm Distance bath edge (foot end) to end of grip gs 600 mm Distance foot end of bath edge to centre of foot hs 600 mm Distance between the feet hs 600 mm Width of feet max. hs 540 mm External radius rs 400 mm Water volume 1951 1951 Net weight 53 kg Pedestal 5032 Diameter of anti-slip Ø 435 mm	Distance bath edge to centre of waste hole	f_2	900 mm
Diameter of waste hole f g Ø 52 mm Distance bath edge (foot end) to start of grip g1 758 mm Distance bath edge (foot end) to end of grip g2 1042 mm Distance foot end of bath edge to centre of foot h2 600 mm Distance between the feet h4 600 mm Width of feet max. h6 540 mm External radius r1 400 mm Water volume 1951 Net weight 53 kg Pedestal 5032 Diameter of anti-slip Ø 435 mm	Distance centre of waste hole to centre of overflow hole	f ₇	332 mm
Distance bath edge (foot end) to start of grip g1 758 mm Distance bath edge (foot end) to end of grip g2 1042 mm Distance foot end of bath edge to centre of foot h2 600 mm Distance between the feet h4 600 mm Width of feet max. h6 540 mm External radius r1 400 mm Water volume 195 l Net weight 53 kg Pedestal 5032 Diameter of anti-slip 0 435 mm	Diameter of overflow hole	f ₈	Ø 52 mm
Distance bath edge (foot end) to end of grip or Distance foot end of bath edge to centre of foot or Distance foot end of bath edge to centre of foot or Distance between the feet or Distanc	Diameter of waste hole	f_9	Ø 52 mm
Distance foot end of bath edge to centre of foot h ₂ 600 mm Distance between the feet h ₄ 600 mm Width of feet max. h ₆ 540 mm External radius r ₁ 400 mm Water volume 195 l Net weight 53 kg Pedestal 5032 Diameter of anti-slip Ø 435 mm	Distance bath edge (foot end) to start of grip	g_1	758 mm
Distance between the feet h ₄ 600 mm Width of feet max. h ₆ 540 mm External radius r ₁ 400 mm Water volume 195 l Net weight 53 kg Pedestal 5032 Diameter of anti-slip Ø 435 mm	Distance bath edge (foot end) to end of grip	g_2	1042 mm
Width of feet max. h ₆ 540 mm External radius r ₁ 400 mm Water volume 195 l Net weight 53 kg Pedestal 5032 Diameter of anti-slip Ø 435 mm	Distance foot end of bath edge to centre of foot	h_2	600 mm
External radius r1 400 mm Water volume 195 l Net weight 53 kg Pedestal 5032 Diameter of anti-slip Ø 435 mm	Distance between the feet	h_4	600 mm
Water volume 195 I Net weight 53 kg Pedestal 5032 Diameter of anti-slip Ø 435 mm	Width of feet max.	h ₆	540 mm
Net weight 53 kg Pedestal 5032 Diameter of anti-slip Ø 435 mm	External radius	r_{i}	400 mm
Pedestal 5032 Diameter of anti-slip Ø 435 mm	Watervolume		1951
Diameter of anti-slip Ø 435 mm	Net weight		53 kg
•	Pedestal		5032
Full anti-slip 900 x 300 mm	Diameter of anti-slip		Ø 435 mm
	Full anti-slip		900 x 300 mm