
CONO WALL-HUNG WASHBASIN

- washbasin with premium character exudes elegance and harmony
- optimally integrated enamelled waste accentuates the underlying geometry of the washbasin
- perfectly complements the CONO range
- unusually generous rim provides space for fittings or individual accessories





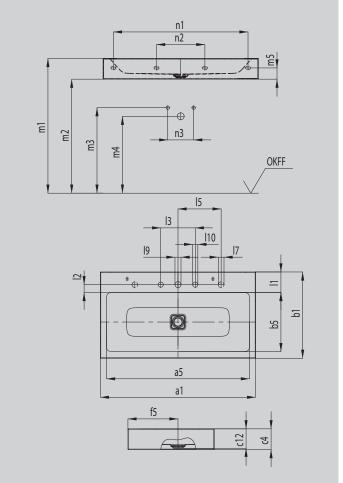

 * Rotary knob hole for waste and overflow valve CLOU with cable pull and rotary knob optionally on the right or left

Model		3090
External length	$a_{_1}$	900 mm
Internal length	a ₅	832 mm
External width	$b_{_1}$	500 mm
Internal width	b ₅	348 mm
Height of rim	C ₄	120 mm
Distance basin surface to bottom edge of waste hole	c ₁₂	112 mm
Distance rear edge to centre of waste hole	f_5	290 mm
Depth of tap deck	I_{i}	116 mm
Distance tap holes to edge	l ₂	45 mm
Distance external tap holes (for 3 tap holes)	I_3	200 mm
Distance tap hole to centre of control knob hole	I ₅	275 mm
Diameter of control knob hole	I ₇	Ø 33 mm
Diameter of centre tap hole	I_g	Ø 35 mm
Diameter of outside tap hole (for 3 tap holes only)	I ₁₀	Ø 30 mm
Distance FF to top edge basin surface	$m_{_1}$	820 - 850 mm
Distance FF to bottom edge	$\mathrm{m_2}$	700 - 730 mm
Distance FF to centre of water inlet	m_3	570 - 600 mm
Distance FF to centre of waste hole wall connection	m_4	520 - 580 mm
Distance bottom edge to centre of fixing hole	$\mathrm{m_{5}}$	65 mm
External distance of fixing holes	$n_{_1}$	780 mm
Internal distance of fixing holes	n_2	280 mm
Distance hot/cold water inlet	n_{3}	80 - 150 mm
Net weight		18 kg