
## CONO WALL-HUNG DOUBLE WASHBASIN

- washbasin with premium character exudes elegance and harmony
- optimally integrated enamelled waste accentuates the underlying geometry of the washbasin
- perfectly complements the CONO range
- unusually generous rim provides space for fittings or individual accessories



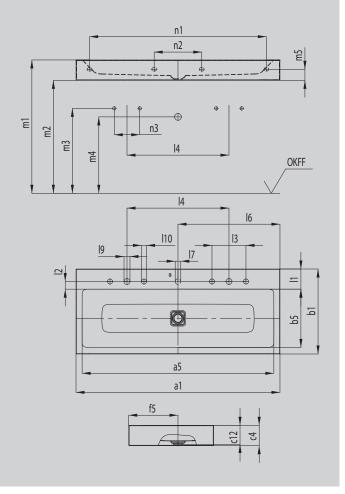

<sup>\*</sup> Rotary knob holes for waste and overflow valve CLOU with cable pull and rotary knob

Model		3091
External length	$a_1$	1200 mm
Internal length	a <sub>5</sub>	1128 mm
External width	$b_1$	500 mm
Internal width	b <sub>5</sub>	343 mm
Height of rim	C <sub>4</sub>	120 mm
Distance basin surface to bottom edge of waste hole	C <sub>12</sub>	112 mm
Distance rear edge to centre of waste hole	f <sub>5</sub>	290 mm
Depth of tap deck	l <sub>1</sub>	116 mm
Distance tap holes to edge	I <sub>2</sub>	45 mm
Distance external tap holes (for 3 tap holes)	l <sub>3</sub>	200 mm
Distance between tap holes	14	600 mm
Distance centre of control knob hole to rear edge	I <sub>6</sub>	600 mm
Diameter of control knob hole	I <sub>7</sub>	Ø 33 mm
Diameter of centre tap hole	l <sub>9</sub>	Ø 35 mm
Diameter of outside tap hole (for 3 tap holes only)	I <sub>10</sub>	Ø 30 mm
Distance FF to top edge basin surface	$m_{_{\! 1}}$	820 - 850 mm
Distance FF to bottom edge	$\mathrm{m_2}$	700 - 730 mm
Distance FF to centre of water inlet	$m_3$	570 - 600 mm
Distance FF to centre of waste hole wall connection	$m_4$	520 - 580 mm
Distance bottom edge to centre of fixing hole	m <sub>5</sub>	65 mm
External distance of fixing holes	$n_i$	1040 mm
Internal distance of fixing holes	$n_2$	280 mm
Distance hot/cold water inlet	$n_3$	80 - 150 mm
Net weight		23 kg

